


FICHA TÉCNICA / FICHE TECHNQUE / TECHNICAL SHEET


SERIE 159 F6

SERIE 159 F6

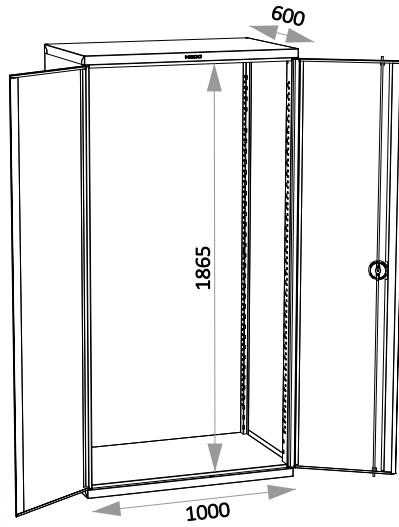

75 Kg
 1200 x 800 x 2130 mm

SERIE 159 F6 B

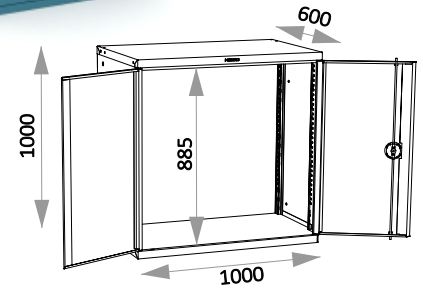

38,1 Kg
 1200 x 800 x 1130 mm


Características / Caractéristiques / Characteristics



Apertura de las puertas a 180°.
Ouverture des portes à 180°.
180° doors opening.



Cierre con llave 2 puntos (2 llaves).
Fermeture à clé 2 points (2 clés).
2 point key Locking (2 keys).



Apertura 100%.
Ouverture 100%.
100% opening.



Cartón individual y palet.
Carton simple et palette.
Single cardboard and pallet.

Componentes
Composants / Components

Accesorios opcionales
Accessoires optionnels / Optional accessories

Material Matériel / Material

Armazón.
Chassis.
Frame.

Chapa pulida
Tôle polie
Polished sheet

1 mm

Componentes.
Composants.
Components.

Chapa pulida
Tôle polie
Polished sheet

Variable
Variable
Variable

Color
Couleur
Colour

Azul martelé
Bleu martelé
Hammered blue

Acabado Finition / Finishing

Soldado por resistencia, secado a estufa, previo desengrasado y fosfatado.
Soudée par resistance, séchée au four après dégraissage et phosphatage.
Welded by resistance, drying oven prior degreasing and phosphate.

Opción / Option / Option

SERIE CE P 1



Cierre electrónico
Verrou électronique
Electronic locking




Color opcional
Couleur sur demande
Choice of colours



Información de opciones estándares en catálogo general en web.
Informations sur les options standard dans le catalogue général en web.
Information of standard options in the general catalog on web.




Ref. 157 CP
(4,92 l)
0,5 kg




Ref. 157 CG
(7,56 l)
0,75 kg




Ref. 159 TC
0,76 kg
1,5mm



Ref. 159 F6 BG
5,23 kg
1mm




Ref. 159 F6 TI
1mm
8,68 kg




Ref. 159 PPF
12 kg
1,2mm




Ref. 159 F6 PPL
6,4 kg
1,2mm




Ref. 159 PV
0,6mm



Ref. 159 F6 T50 C100
8,4 kg
0,8mm
2u. 162 DP 100
(MAX. 8)



Ref. 159 F6 T50 C150
9,7 kg
0,8mm
2u. 162 DP 150
(MAX. 8)



Ref. 159 F6 T50 C200
11 kg
0,8mm
2u. 162 DP 200
(MAX. 8)