


FICHA TÉCNICA / FICHE TECHNIQUE / TECHNICAL SHEET

SERIE 157 2P

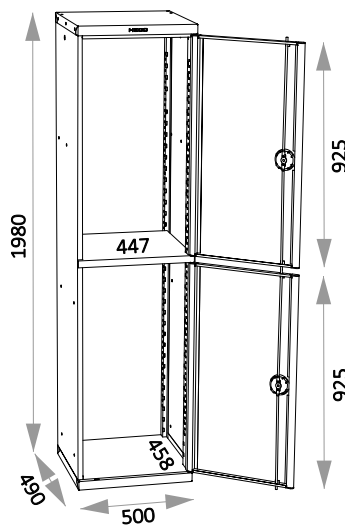

43 Kg
 670 x 550 x 2130 mm

Características / Caractéristiques / Characteristics



Apertura de las puertas a 180°.
Ouverture des portes à 180°.
180° doors opening.



Cierre con llave 2 puntos (2 llaves).
Fermeture à clé 2 points (2 clés).
2 point key Locking (2 keys).



GT

50

Apertura 100%.
Ouverture 100%.
100% opening.



Cartón individual y palet.
Carton simple et palette.
Single cardboard and pallet.

Componentes Composants / Components

Accesorios opcionales Accessoires optionnels / Optional accessories

Material Matériel / Material

Armazón.
Chassis.
Frame.

Chapa pulida
Tôle polie
Polished sheet

1 mm

Componentes.
Composants.
Components.

Chapa pulida
Tôle polie
Polished sheet

Variable
Variable
Variable

Color
Couleur
Colour

Azul martelé
Bleu martelé
Hammered blue

Acabado Finition / Finishing

Soldado por resistencia, secado a estufa, previo desengrasado y fosfatado.
Soudée par résistance, séchée au four après dégraissage et phosphatage.
Welded by resistance, drying oven prior degreasing and phosphate.

Opción / Option / Option

SERIE CE P 1



Cierre electrónico
Verrou électronique
Electronic locking




Color opcional
Couleur sur demande
Choice of colours




Información de opciones estándares en catálogo general en web.
Informations sur les options standard dans le catalogue général en web.
Information of standard options in the general catalog on web.




Ref. 156 P
2 unidades
2 unités
2mm




Ref. 157 BG
2 kg
0,8mm




Ref. 157 BP
2,5 kg
0,8mm




Ref. 157 TI
1mm
4,22 kg




Ref. 157 T50 C100
3,81 kg
0,8mm
1u. 159 DP 100 (MAX. 3)



Ref. 157 T50 C200
5,5 kg
0,8mm
1u. 159 DP 200 (MAX. 3)




Ref. 157 CP
(4,92 l)
0,5 kg



Ref. 157 CG
(7,56 l)
0,75 kg

Ref. 157 TC
0,37 kg
1,5mm



Ref. 157 S M

